



L30838(ADS48N)
L30838-39(ADS60N)
L30839-42(ADS88N)
L308(ADS116N)

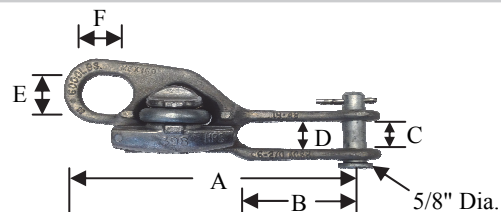

ASOD3981N
ASOD5701N

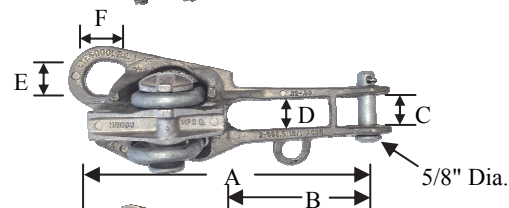

HCD88N

Numéro de catalogue. Catalog number.	Gamme de serrage Clamping Range			Dimension po. / in.						Boulons en U U-Bolts		Force Ultime (lbs) Ultimate Strength (lbs)	Poids (lbs) Weight (lbs)
	po. in.	ACSR	ALUM	A	B	C	D	E	F	#	Grosseur / Size	Corps / Body	
ASOD3981N	.19 - .48	#6 2/0	#4 2/0	8	3 5/8	11/16	11/16	1	1 1/2	1	3/8	6,000	1.14
ASOD5701N	.19 - .57	#6 4/0	#4 4/0	8 5/8	3 3/4	11/16	11/16	1	1 1/2	1	1/2	8000	1.91
L30838-39 (ADS60N)	.19 - .60	#6 266.8	#4 266.8	8 1/4	4	3/4	3/4	1 1/8	1 5/8	2	1/2	8,000	2
L30839-42 (ADS88N)	.31 - .88	#2 556.5	#1 556.5	9	4 1/2	15/16	15/16	1 1/8	1 5/8	2	1/2	10,000	2.2
HCD88N	.32 .88	#2 556.5	#1 556.5	10 3/8	5 1/8	1	1	1 1/8	1 5/16	2	1/2	10,000	3.3
L308 (ADS116N)	.31 - 1.16	#2 954	#1 1000	10 1/2	5 1/2	1	1	1 1/8	1 5/8	2	1/2	15,000	2.9

Note: Pour câble en aluminium
For aluminum cable

Couple de serrage recommandé: 3/8''(240 lbs-po), 1/2'' (480 lbs-po)
Recommended torque 3/8'' (240 in-lbs), 1/2'' (480 in-lbs)

Matériel: Corps: Aluminium, Boulons Acier Galvanisé

Material: Body: Aluminum, Bolts Galvanized steel

PINCE D'AMARRAGE DROITE / STRAIGHT LINE CLAMP