

Customer:

20201 Clark Graham, Baie-D'Urfé, QC H9X 3T5
Tél: (514) 457-8886 / 1-800-363-8420 Fax: 514-457-6787
PTSELECTRIQUE.COM



Critical Impulse Flashover Voltage
Pos.: 280kV
Low Frequency Withstand Voltage
Wet: 100kV
Impulse Withstand Voltage: 250kV
Radio Influence Voltage Data:
Test Voltage to Ground: 30kV;
Maximum RIV at 1000kHz: 200µV




Creepage Distance: 50"
Net weight: 48.5lb.

MECHANICAL PROPERTIES

Cantilever Strength Upright/Underhung: 2000lb.
Tension Strength: 8000lb.
Torsion Strength: 12000in.-lb.
Compression Strength: 15000lb.

According to Standard Specification:
ANSI C 29.9 except drawing

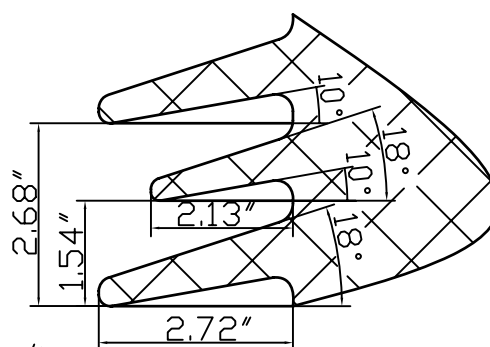

Scale	1:1.5
Design	W.C.M
Check	L.H.X
Approve	Z.Y.X
Date	2012.12.11

OUTDOOR SOLID-CORE POST INSULATOR

Designation	
Cat.No.	TR13
Drawing No.	346880E2
Issue	1