

Origin:

Customer:


PTS
ÉLECTRIQUE Ltée

ISO 9001

20201 Clark Graham, Baie-D'Urfé, QC H9X 3T5

Tél: (514) 457-8886 / 1-800-363-8420 Fax: 514-457-6787

PTSELECTRIQUE.COM

Design Approve

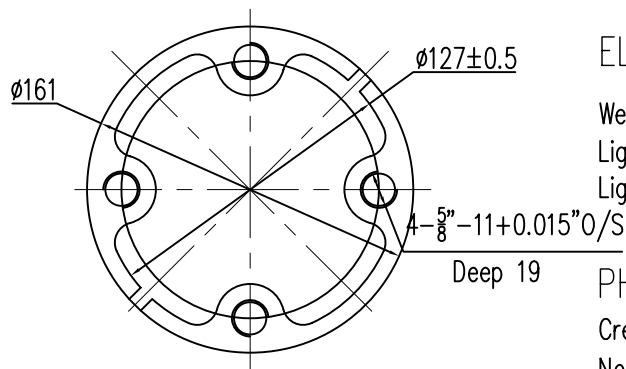
modify

Issue

Design Approve

modify

Issue



ELECTRICAL PROPERTIES

Wet Power Frequency Withstand Voltage: 75kV

Lightning Impulse Withstand Voltage: 210kV

Lightning Impulse Flashover Voltage: 235kV(Pos.)

PHYSICAL PROPERTIES

Creepage Distance: 838mm

Net weight: 31Kg

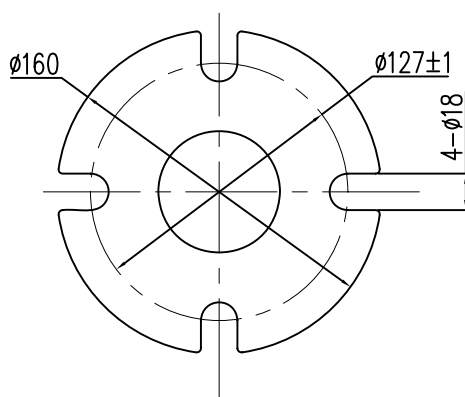
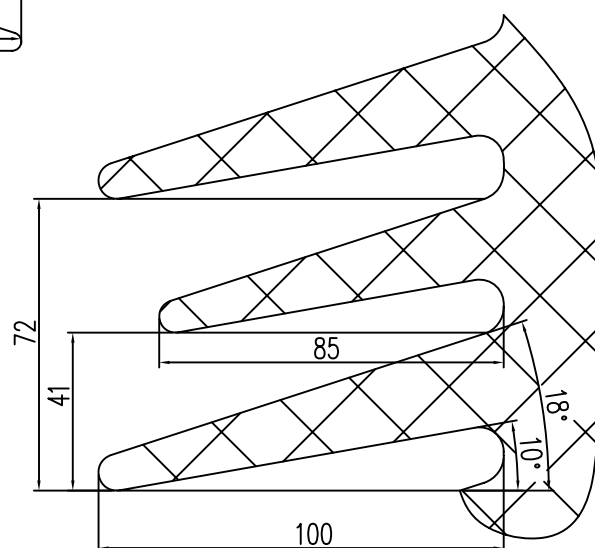
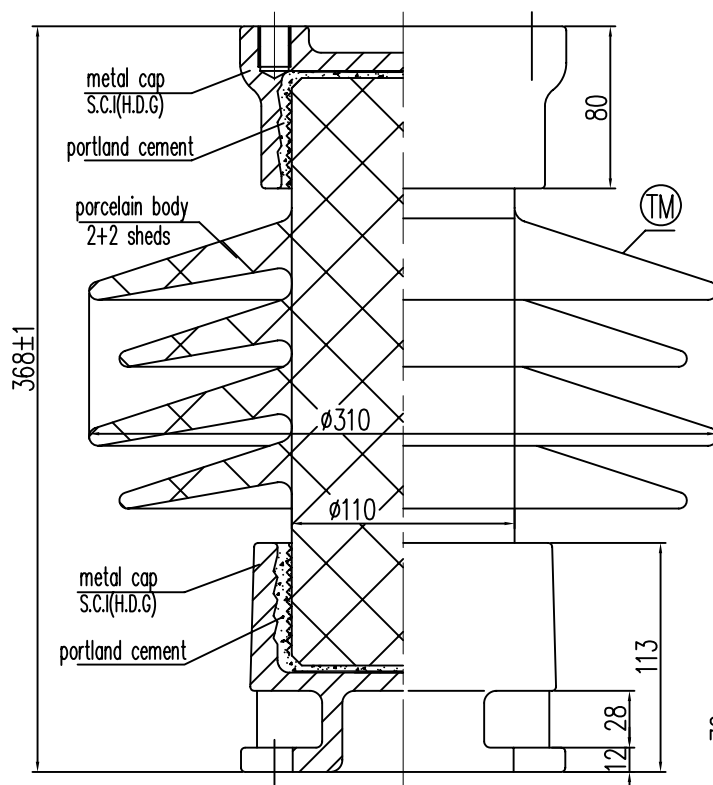
MECHANICAL PROPERTIES

Cantilever Strength: 32kN/18kN(upright/underhang)

Tensile Strength: 90kN

Torsional Strength: 4.6kN·m

Compression Strength: 268kN

According to Standard Specification:
IEC 60273 except drawing.
SUZHOU PORCELAIN
INSULATOR WORKS

Scale	1:1.5
Design	W.C.M
Check	L.H.X
Approve	Z.Y.X
Date	2013.12.18

OUTDOOR SOLID-CORE
POST INSULATOR

Designation	
Cat.No.	TR140 (C32-210)
Drawing No.	35115
Issue	1